



1.) Align the fence centrally with the cutter opening



2.) Move the new mounting hole 45 mm towards the outer edge of the fence.

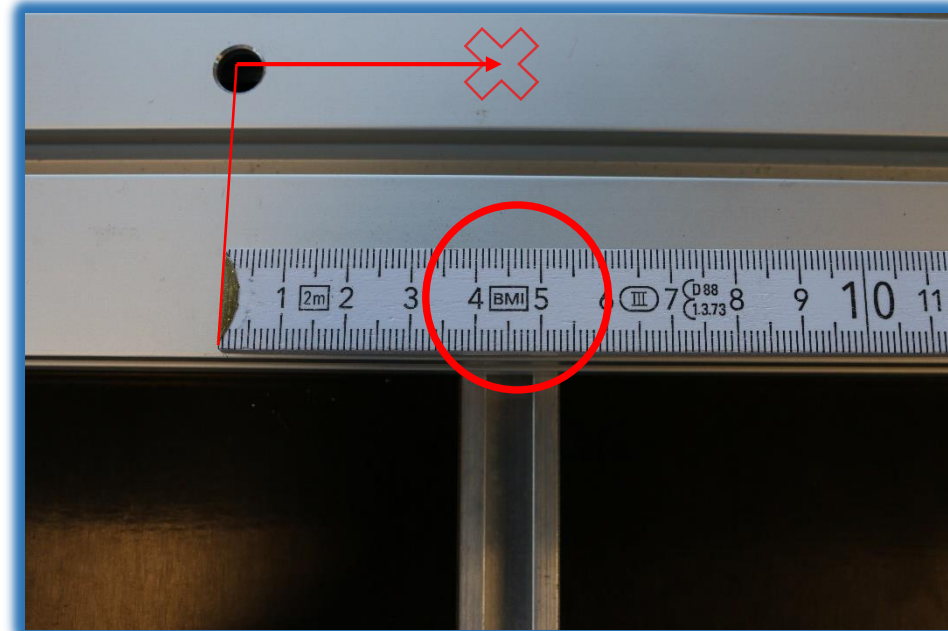

Instructions for mounting the Superfence





to the FTP 2.0 router table

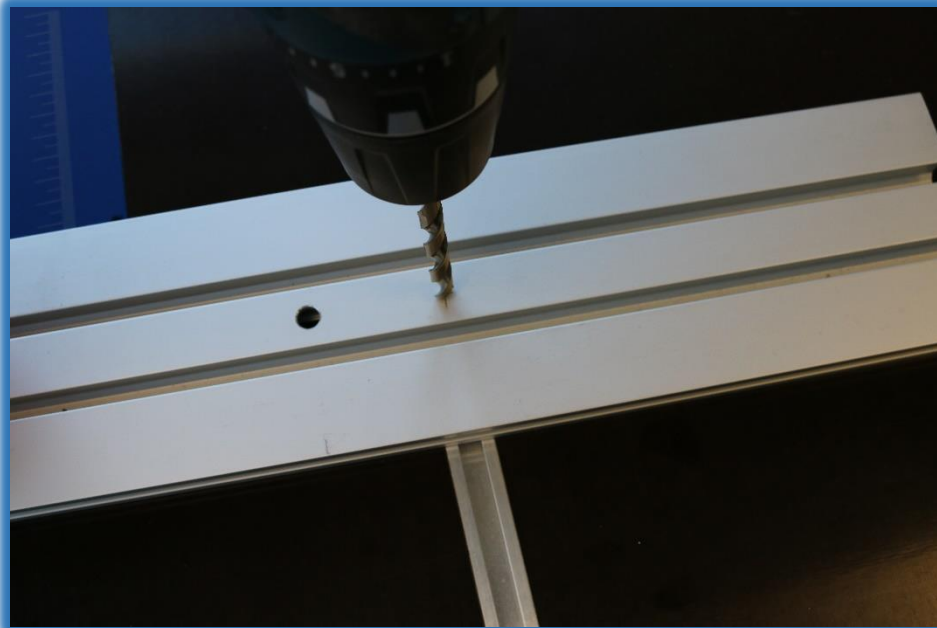

3.) Drill the newly marked fixing hole (8,5 mm)



4.) Deburr the newly drilled hole



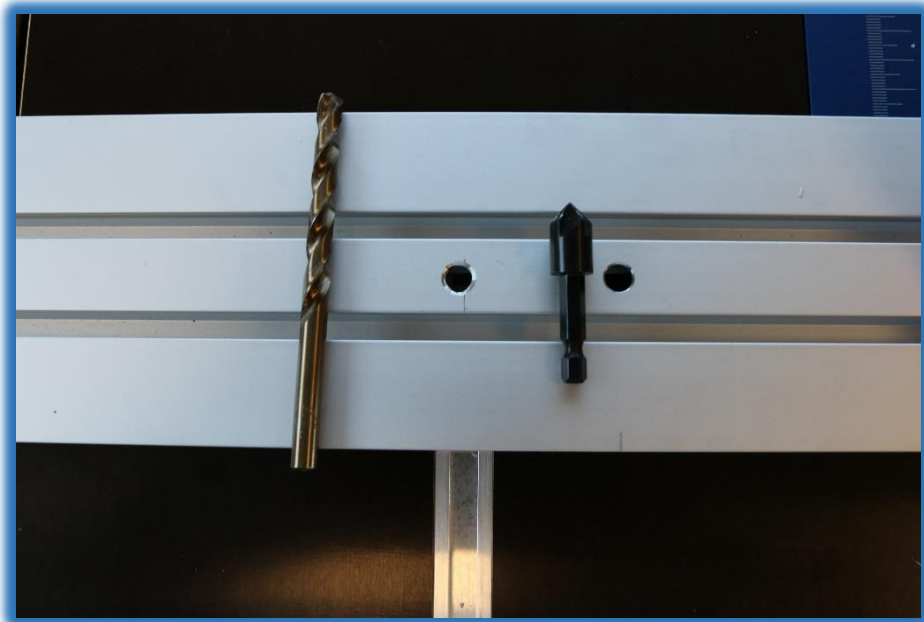

5.) Drill the same hole on the opposite side.

6.) Assemble the Superfence and mount it on the sauter router table top

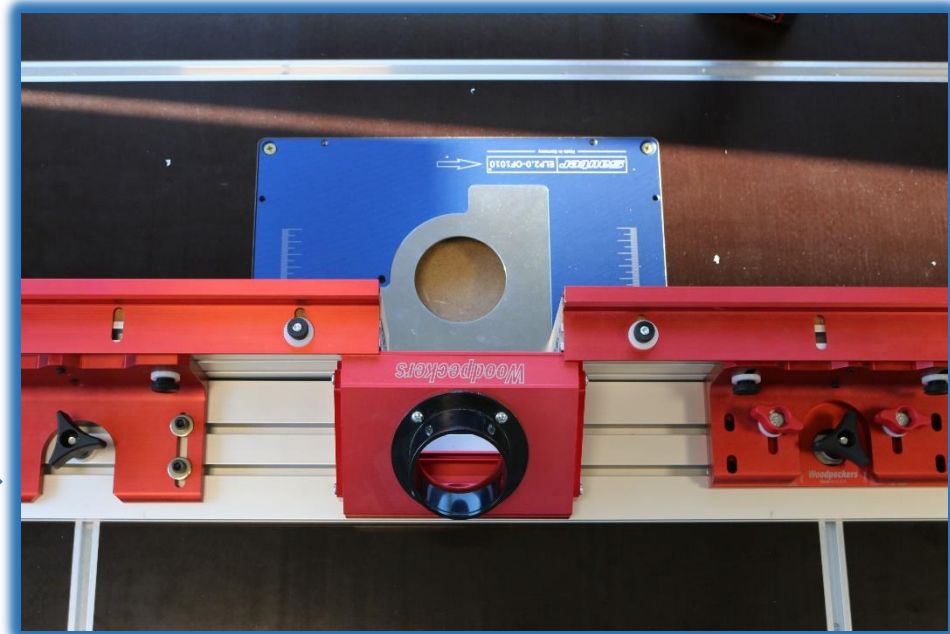

Sauter shop[®]